Lateral Plungers • with thread, with seal

22150.0412



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting. Sealed against chips and dirt.

Material

Seal

• CR

Body

· Steel, zinc-plated by galvanization

• Steel, zinc-plated by galvanization

· Steel, case-hardened, zinc-plated by galvanization

Assembly

Lateral plungers are installed by screwing in by means of a mounting tool.

Formula for calculating the center distance for the mounting hole:

 $I_0 = z/2 + w + x$

 I_0 = center distance,

y = workpiece height,

w = workpiece length,

x = coordinate dimension,

s = stroke,

z = stop diameter

Calculation dimension x:

y greater than or equal to l_2 - $d_2/2$,

then $x = d_2/2 - s$


y smaller than $l_2 - d_2/2$,


then $x = d_2/2 - s - [(l_2 - d_2/2 - y) * 0,123]$

Characteristic

Version heavy spring load = spring from steel, zinc-plated by galvanization

Drawing







Order information


Dimensions					Stroke	ws	x ¹⁾	<u>J</u>	T.	Art. No.	
d₁	I ₁ -2	Spring load F max. ²⁾	d ₂	l ₂	s			max.	_		
ı	 mm]	~ [N]	[m	 m]	[mm]	[mm]	[mm]	[°C]	[9]		
Pin: Steel/Heavy spring load											
M12	11.5	100	5	6	0.8	10	1.7	110	4.2	22150.0412	

¹⁾ If the workpiece height (y) is less than I2-d2/2, the coordinate dimension (x) must be calculated.

Accessories

assembly tool	Dimensions d ₁ [mm]	[9]	Art. No.
1 0	M12	76	22150.0820

Application example

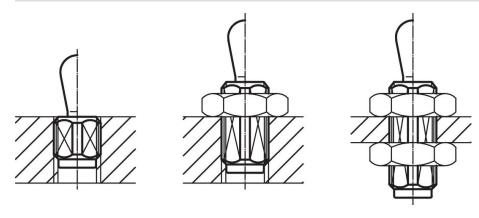

Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Erwin Halder KG

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2 Published on: 2.5.2024

²⁾ statistical average value