Lifting Pins • self-locking, stainless steel

22350.0704



Product Description

Heavy-duty lifting element for quick and easy use, with moveable shackle and locking stud to provide protection against unintentional unlocking. Special lifting devices, e.g. threads for ring bolts, are no longer required on the workpiece.

Corrosion and weathering resistant, thus also suitable for outdoor application. Very solid, precipitation-hardened pin with an extreme load capacity.

Material

Pin part

 Stainless steel 1.4542, precipitationhardened

Press button

· Aluminium, red anodised

Shackle

Stainless steel 1.4571

Spring

· Stainless Steel

Assembly

Simple H11 boreholes are sufficient.

Mounting:

- 1. Press in the button and hold it down
- 2. Insert the lifting pin
- 3. Release the button (The button must be back in its original position)

Dismantling:

- 1. Press in the button and hold it down.
- 2. Remove the lifting pin.
- 3. Release the button.

Operation

Each lifting pin contains an instruction manual with an EC Declaration of Conformity.

More information

Accessories

As accessories, we offer matching locating bushings for d_1 = 8, 10, 12, 16 and 20

Further products

- · Lifting Pins, self-locking
- Locating Bushings, for lifting pins
- · Locating Bushings, plain, for lifting pins
- Locating Bushings with Seal, plain, for lifting pins
- Threaded Lifting Pins, self-locking
- Threaded Lifting Pins, self-locking, for centre holes according to DIN 332
- Threaded Lifting Pins, self-locking, with rotatable shackle
- Threaded Lifting Pins, self-locking INCH
- Threaded Lifting Pins, self-locking, with rotatable shackle - INCH








Erwin Halder KG www.halder.com

Published on: 6.4.2024

Drawing

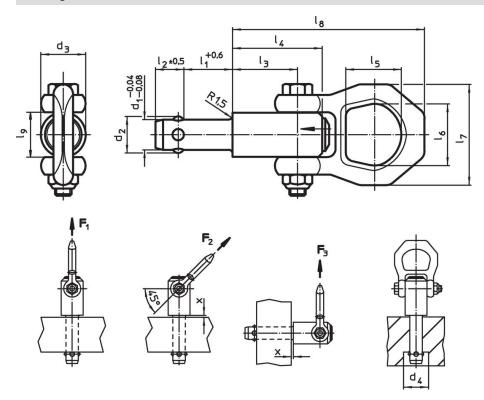

Order information

| Dimensions | | | | | | | | | | | | | Load capacity according to DIN EN 13155 | | | | | Location hole H11 | max. | Ĭ | Art. No. |
|-----------------------------------------|------|----------------|----------------|--------------------|-------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------------------------------|----------------|----------------|------------------|------|-------------------------|------|-----|------------|
| d ₁ -0.04 -0.08 | | d ₂ | d ₃ | d ₄ min. | l ₂ ±0.5 | l ₃ | l ₄ | l ₅ | l ₆ | l ₇ | I ₈ | l ₉ | F ₁ | F ₂ | F ₃ | x min. | max. | | | | |
| | [mm] | | | | | | | | | | | | | | [kN] | | | [mm] | [°C] | [g] | |
| 8 | 25 | 9.35 | 21.5 | 9.85 | 8.75 | 25.7 | 36 | 27 | 30 | 49 | 87.5 | 21.5 | 1.5 | 1.2 | 0.5 | 1.5 | 15 | 8 | 250 | 275 | 22350.0704 |

Erwin Halder KG www.halder.com

Application example















Erwin Halder KG

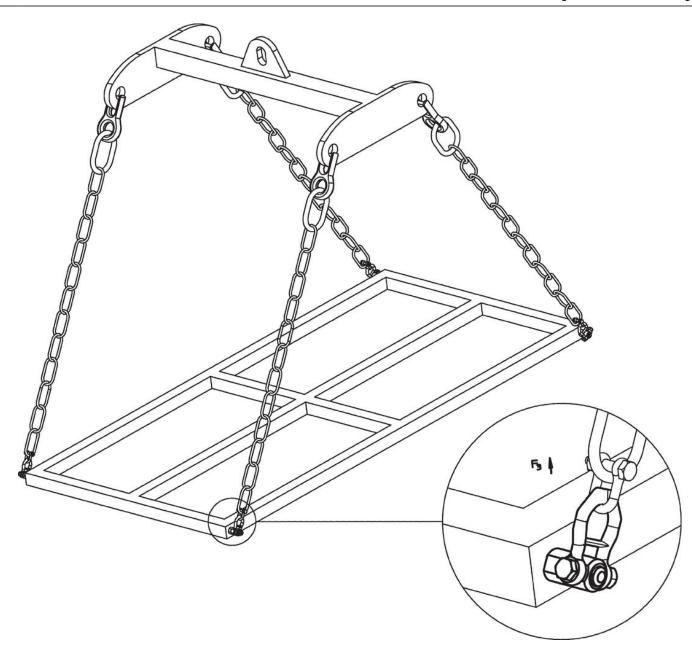

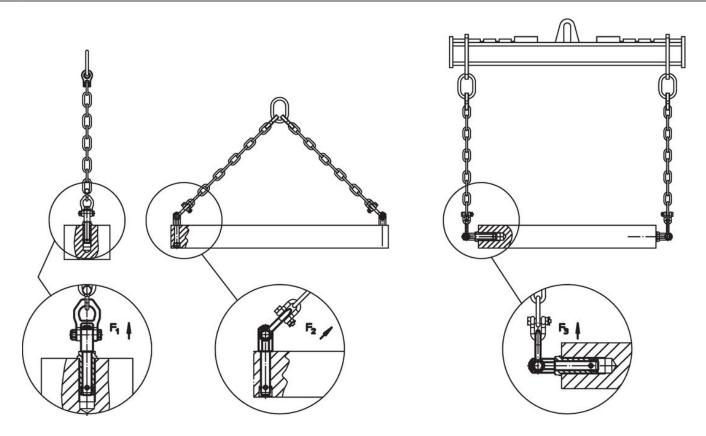

Compliance

Non-RoHS compliant

Not compliant according to Directive 2011/65/EU and Directive 2015/863.

Erwin Halder KG

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Page 7 of 7 Published on: 6.4.2024