# Ball Lock Pins · self-locking, with adjustable handle

22370.0619



# **Product Description**

For fixing and clamping of two parts or play-free application to the counterpart. Clamping range infinitely variable by hand via nut/lock nut.

All versions are corrosion resistant. When using stainless steel 1.4542: high-strength, hardened, abrasion resistant pin with high load capacity.

#### **Material**

## Pin part

• Stainless steel 1.4305

#### Lock nut

· Thermoplastic, black

#### Spring

· Stainless steel

## Adjusting nut

· Thermoplastic, silver

#### **Operation**

The balls are unlocked by pressing the button.

#### Characteristic

Types from stainless steel 1.4542 with marking below the balls.

## More information

#### **Notes**

Special types on request.


#### Accessories

Can easily be fitted with retaining cable EH 22400.

# **Further products**

- Locating Bushings, for ball lock pins and socket pins
- Locating Bushings, with flange, for ball lock pins and socket pins
- Retaining Cables
- · Positioning Bushings, with collar, DIN 172 A
- Positioning Bushings, without collar, DIN 179 A

## **Drawing**

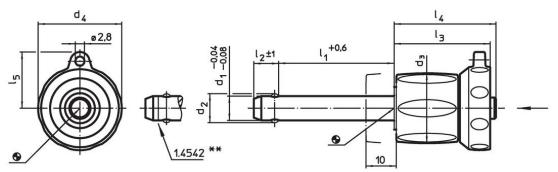

Erwin Halder KG

\*\* Types from stainless steel 1.4542 with marking.

www.halder.com Page 1 of 3


Page 1 of 3 Published on: 3.2.2024

# **Order information**

<b>d</b> <sub>1</sub>	l <sub>1</sub> +0.6	d <sub>2</sub>	d <sub>3</sub>	Dimensio	ons   I <sub>2</sub> ±1	l <sub>3</sub>	I <sub>4</sub>	l <sub>5</sub>	Location hole H11	min.	max.	i	Shearing resistance, two-shear <sup>1)</sup> min.	Art. No.
-0.08									[mm]	[°C] [g]		[g]	[kN]	
Stainless steel														
8	35 – 45	9.5	23	27.6	8.2	31.2	33.1	18	8	-30	80	65	38	22370.0619

<sup>1)</sup> Shearing resistance similar to DIN 50141

# **Application example**

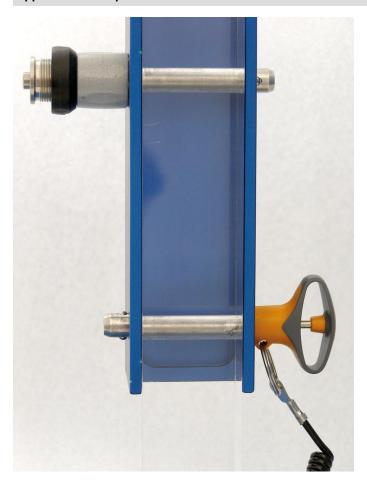



www.halder.com Page 2 of 3
Published on: 3.2.2024



# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

# Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Erwin Halder KG

## Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 3 of 3

Published on: 3.2.2024