Mounting Pads 22590.0106



Product Description

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

Material

Ball element

• Stainless steel 1.4305

Pad


· Thermoplastic POM, white


More information

Notes

For the versions d_1 = M10 and M12 the lock nut conforms to DIN 934.

Drawing



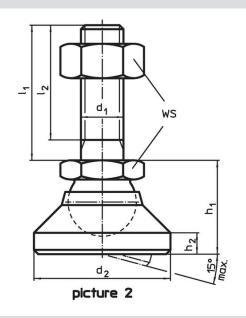

Order information

Dimensions					ws	Load capacity for static load			Ĭ	Art. No.
d ₁	d ₂	h ₁ ~	h ₂	t		max.	min.	max.		
[mm]					[mm]	[kN]	[°C]		[g]	
pad from thermoplastic, ball element from stainless steel – picture 1, Thermoplastic										
М6	20	14	2.5	5	10	4	-30	80	6.1	22590.0106




Erwin Halder KG

Page 1 of 2 Published on: 3.2.2024

www.halder.com

Application example

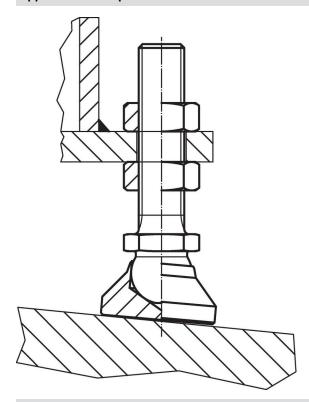

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Erwin Halder KG

Does not contain Proposition 65 substances

No Proposition 65 substances included.

https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2

Published on: 3.2.2024