Mounting Pads • with fastening holes

22590.0710



Product Description

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

Including two fastening holes in pad.

Material

Ball element

· Stainless steel 1.4305

Pad


• Stainless steel 1.4305


More information

Notes

For the versions d_1 = M10 and M12 the lock nut conforms to DIN 934.

Drawing

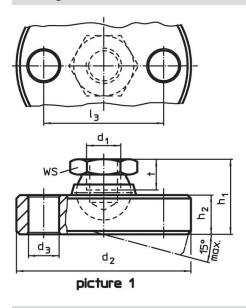


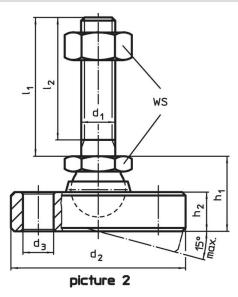

Order information

Dimensions						ws	Load capacity	I	Art. No.
d ₂	d ₃	l ₃	h₁	h ₂	t		for static load	_	
-0.5			~				max.		
[mm]						[mm]	[kN]	[g]	
pad and ball element from stainless steel – picture 1									
60	9	44	22	11.5	9	17	16	251	22590.0710
	-0.5	-0.5	d ₂ d ₃ I ₃ -0.5 [mm] ment from stainless steel – picture 1	d ₂ d ₃ I ₃ h ₁ ~	d ₂	d ₂ d ₃ l ₃ h ₁ h ₂ t -0.5	d2 d3 I3 h1 h2 t -0.5 [mm] [mm] [mm]	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	d2 d3 l3 h1 h2 t for static load max. -0.5 _ _ _ [mm] [kN] [g] ment from stainless steel – picture 1

Application example

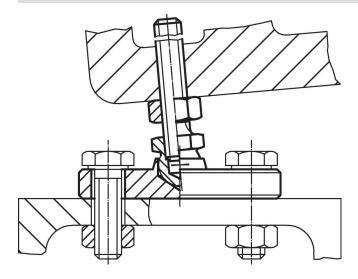

Published on: 3.2.2024

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 2 of 2

Published on: 3.2.2024