# **Height-Adjusting Elements** 25120.0006



# **Product Description**


For levelling of machines and installations.


For vertical adjustment, the self-locking height-adjusting elements are fitted with a fine-pitch thread. All elements have a throughgoing bore for fastening purposes. A turn-out lock serves as height limit for the maximum adjustment height.

#### Material

· Heat-treated steel, zinc-plated by galvanization, chromalized

# Drawing





# **Order information**

		Dimensions			Stroke	For screw	Load capacity	Load capacity	I	Art. No.
d₁	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		for static load	max.	_	
			~	~	~		max.			
[mm]					[mm]	[mm]	[kN]	[kN]	[g]	
6.6	25	M15 x 1	15	19	4	M6	40	30.7	42	25120.0006

#### **Accessories**

	For height adjusting element size d <sub>2</sub> [mm]	Dimensions of sickle spanner DIN 1810, form A [mm]	[9]	Art. No.
sickle spanner for vertical	al adjustment			
	25	25 – 28	45	25120.0981




Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 3.2.2024

# **Application example**

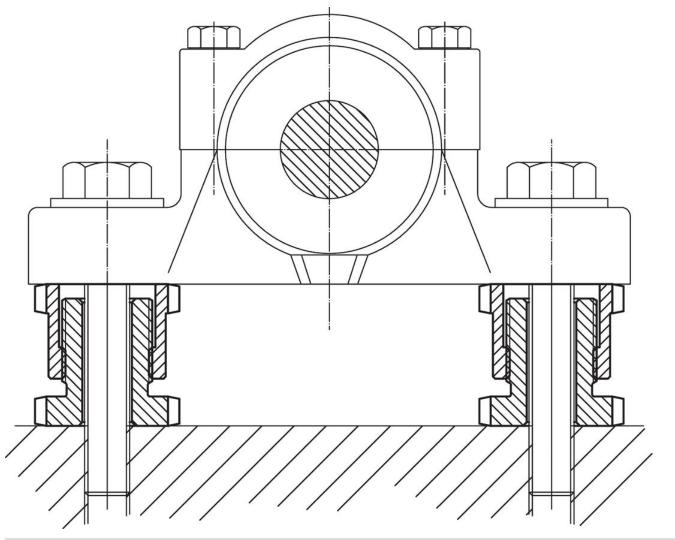

## Compliance

#### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

## Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

# Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 3.2.2024