# Index Plungers Compact • with hexagon collar and locking, with T-Handle 22110.0834



## **Product Description**

Index plungers are used for indexing bores.

Simple handling, e.g. when using safety gloves, with higher pull release.

Types with / without lock have the same building height.

Due to a thread recess the index plungers can be completely screwed in.

#### **Material**

### **Body**

· Steel, blackened

#### Locking pin

· Steel, hardened

#### Knob

· Thermoplastic PA 6, black, dull

#### **Assembly**

The screw length can be adapted by distance collars for index plungers (EH 22120.).

The T-Handle is pulled out, turned 90° and secured by an internal notched catch (when locking pin should not overhang). The positions are defined distinctively by the T-Handle.

#### More information


#### Notes


Knob not removable. Lock nuts have to be purchased separately.

#### **Further products**

- · Mounting Blocks, for index bolts and index plungers, die-cast
- Locating Bushings, for index bolts and index plungers
- · Distance Collars, for index plungers

### **Drawing**

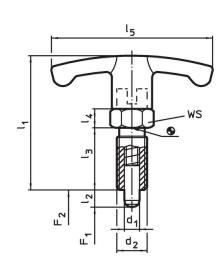

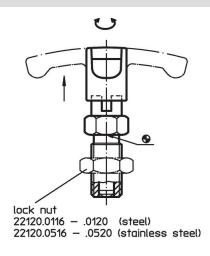

## **Order information**

Dimensions							ws	Spring load <sup>1)</sup>				I	Art. No.
<b>d</b> <sub>1</sub> -0.02 -0.05	l <sub>2</sub>	d <sub>2</sub>	I <sub>1</sub>	I <sub>3</sub>	I <sub>4</sub>	l <sub>5</sub>		F <sub>1</sub> ~	F <sub>2</sub> ~	min.	max.		
[mm]							[mm]		[N]	[°C	]	[g]	
Steel													
6	9	M12 x 1,5	48	22	6	54	14	6	25	-30	80	34	22110.0834


<sup>1)</sup> statistical average value


Erwin Halder KG www.halder.com Page 1 of 2 Published on: 3.2.2024

## **Accessories**

	Dimensions ${\sf d_2}$	Wrench size	Ĭ.	Art. No.					
	[mm]	[mm]	[g]						
Lock nuts ISO 8675 (DIN 439), Steel									
	M12 x 1,5	18	7.5	22120.0116					

## **Application example**

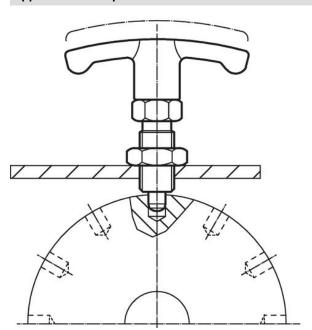

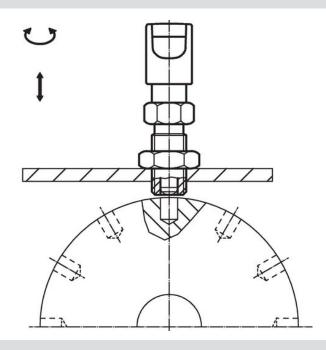

## Compliance

## **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

## Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

## **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 3.2.2024