Lateral Plungers • smooth, with seal

22150.0122



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting. Sealed against chips and dirt.

Material

Seal

• CR

Body

Aluminium Al

Spring

• Steel, zinc-plated by galvanization

· Steel, case-hardened, zinc-plated by galvanization

Assembly

Installation by pressing in.

Formula for calculating the center distance for the mounting hole:

 $I_0 = z/2 + w + x$

 I_0 = center distance,

y = workpiece height,

w = workpiece length,

x = coordinate dimension,

s = stroke,

z = stop diameter

Calculation dimension x:

y greater than or equal to l_2 - $d_2/2$,

then $x = d_2/2 - s$

y smaller than l_2 - $d_2/2$,

then $x = d_2/2 - s - [(I_2 - d_2/2 - y) * 0,123]$

Characteristic


Version heavy spring load = spring from steel, zinc-plated by galvanization


More information

Further products

· Eccentric Mounting Bushings, for lateral plungers, smooth

Drawing



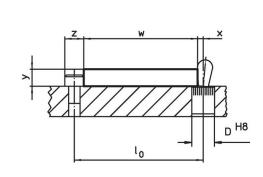

Erwin Halder KG

Order information

Dimensions		Spring load	Dimensions		Stroke	Location hole		I	Art. No.		
d ₁	d ₂	F max. ¹⁾ ~	I ₁ -2	I₂ ±0.5	s	D H8	max.	_			
[mm]		[N]	[m	m]	[mm]	[mm]	[°C]	[g]			
Pin: Steel/pin from steel, heavy spring load											
10	5	100	12	6.3	1.6	10	110	3	22150.0122		


¹⁾ statistical average value

www.halder.com Page 1 of 2

Accessories

assembly tool	Dimensions d ₁ [mm]	[9]	Art. No.
	10	49	22150.0831

Application example

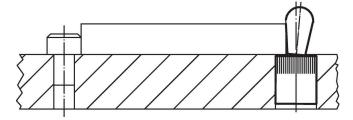

Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 3.2.2024