Lateral Plungers • with thread, without seal 22150.0393



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting.

Material

Body

Steel, zinc-plated by galvanization

Spring

Stainless steel

Pin

· Thermoplastic POM, white


Assembly

Lateral plungers are installed by screwing in by means of a mounting tool. Formula for calculating the center distance for the mounting hole: $I_0 = z/2 + w + x$, I₀ = center distance, y = workpiece height, w = workpiece length, x = coordinate dimension,s = stroke, z = stop diameter Calculation dimension x: y greater than or equal to $I_2 - d_2/2$, then $x = d_2/2 - s$ or y smaller than $I_2 - d_2/2$, then $x = d_2/2 - s - [(l_2 - d_2/2 - y) * 0,123]$

Characteristic

Version light spring load = spring from stainless steel

Drawing





Order information


Dimensions					Stroke	WS		I	Art. No.
d1	Ι ₁ -2	Spring load F max. ¹⁾ ~	d ₂	l ₂	S		max.	-	
[mm]		[N]		[mm]	[mm]	[mm]	[°C]	[g]	
Pin: Thermoplastic/Light spring	load								
M18 x 1,5	31.5	100	10	16.9	3.2	16	80	20	22150.0393

¹⁾ statistical average value

Accessories

assembly tool	Dimensions d ₁ [mm]	[9]	Art. No.
	M18 x 1,5	137	22150.0822

Application example

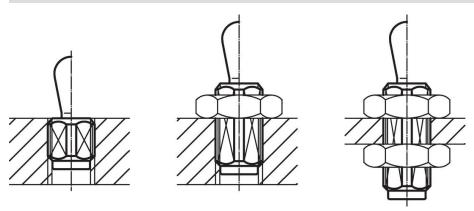

Compliance

Compliance

RoHS compliant Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.