# Clamping Catches 22260.0550



#### **Product Description**

Clamping catches have a round running taper surface and enable fast and safe clamping and releasing with a relatively large adjustment range and high tensioning force. Due to the small gradient angle of the taper surface, the clamping catch is self-locking.

#### Material

#### **Body**

• Steel, case-hardened, blackened

#### Screw

· Steel, nitrided

Fix with screw bolt M 10 (WS 6). Ensure a tightening torque of max. 40 Nm.

## Operation


The screw bolt and the washer are adjustable. Once screwed in, the clamping catch can easily be turned to the desired position. For Art. No. 22260.0250 / .0251 and 22260.0450 / .0451, the serration helps to put the tension lever to the preferred position.

#### More information

#### Notes

Left turn type can be supplied on request.

#### Drawing

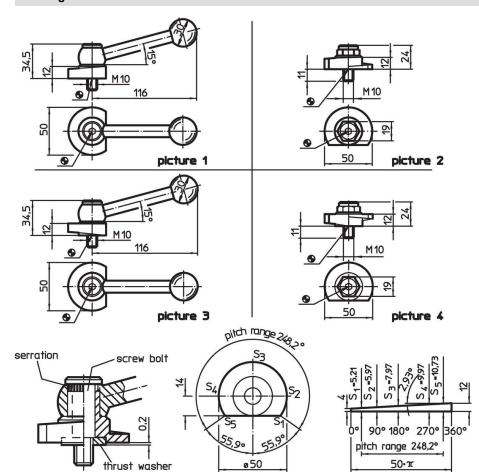

Erwin Halder KG


www.halder.com Page 1 of 3


Published on: 3.2.2024

## **Order information**

Tightening		Art. No.
torque		
max.		
[Nm]	[9]	
with clamping screw, pitch on bearing surface – picture 4, Steel		
40	154	22260.0550

## **Application example**

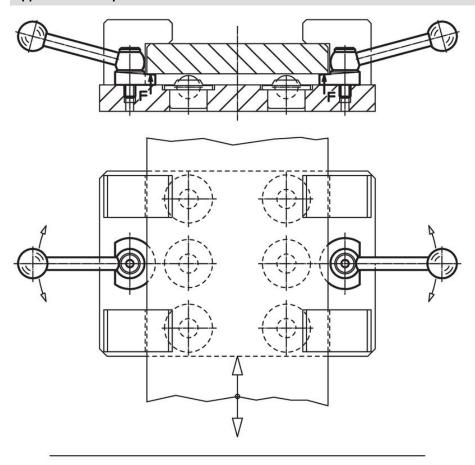

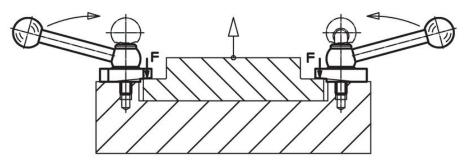

Page 2 of 3 Published on: 3.2.2024

www.halder.com

## Compliance

## **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

#### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

#### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 3 of 3

Published on: 3.2.2024