# Ball Lock Pins · self-locking, with button handle

22350.0233



## **Product Description**

For quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

All versions are corrosion resistant. When using stainless steel 1.4542: high-strength, hardened, abrasion resistant pin with high load capacity. Compact design with button handle.

#### Material

## Pin part

 Stainless steel 1.4542, precipitationhardened

#### Handle

· Aluminium, black similar to RAL 9005

#### Press button

· Stainless steel, black

#### **Spring**

· Stainless steel

## **Operation**

The balls are unlocked by pressing the button.

## Characteristic

Types from stainless steel 1.4542 with marking below the balls.

#### More information

#### **Notes**

Special types on request.

#### Accessories

Can easily be fitted with retaining cable EH 22400.

## **Further products**

- Locating Bushings, for ball lock pins and socket pins
- Locating Bushings, with flange, for ball lock pins and socket pins
- Retaining Cables
- Positioning Bushings, with collar, DIN 172 A
- Positioning Bushings, without collar, DIN 179 A
- Ball Lock Pins with Button Handle, single acting - comply with NAS / MS17984

## **Drawing**



\*\* Types from stainless steel 1.4542 with marking.

Erwin Halder KG www.halder.com Page 1 of 2


Published on: 3.2.2024

## **Order information**

<b>d</b> <sub>1</sub> -0.04 -0.08		d <sub>2</sub>	d <sub>3</sub>	Dime d <sub>4</sub>	ensions I <sub>2</sub> ±1	I <sub>3</sub>	I <sub>4</sub>	l <sub>5</sub>	Location hole H11	min. max.	ı	Shearing resistance, two-shear <sup>1)</sup> min.	Art. No.	
[mm]								[mm]	[°C]	[g]	[kN]			
Stain	Stainless steel													
8	15	9.5	14.1	25	8.2	27.3	22.6	18.6	8	-30 150	27	63	22350.0233	

<sup>1)</sup> Shearing resistance similar to DIN 50141

## **Application example**

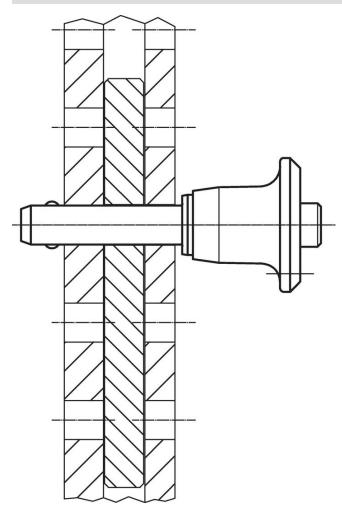

## Compliance

## Non-RoHS compliant

Not compliant according to Directive 2011/65/EU and Directive 2015/863.

Erwin Halder KG

## Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

## **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2

Published on: 3.2.2024