Self-Aligning Pads ⋅ self-resetting 22731.0020



Product Description

Self-aligning pads are used as stop, support and thrust pad and are suitable for installation in clamping elements.

By resetting to the parallel position the contact point of the self-aligning pad provides a defined initial position, thus preventing the pad clamping in an oblique position when inserting the workpiece.

Material

Spring element

· Thermoplastic PUR

· Ball-bearing steel, hardened, bright


· Heat-treated steel, tempered, phosphated

More information


Notes


Ball protected against rotating. Loading capacity valid for steel and stainless steel designs.

Drawing




picture 1





picture 3




picture 4

Order information

Dimensions						ws	Load capacity	Tightening	I	Art. No.
d ₁	d ₂	d ₃	I ₁	l₂ -0.5	Ball diameter		for static load max.	torque max.		
[mm]						[mm]	[kN]	[Nm]	[9]	
with male thread, flat-faced ball, bearing surface plain – picture 1, Heat-treated steel										
20	M12	10.5	18	12	16	17	25	82	43	22731.0020

Erwin Halder KG www.halder.com Page 1 of 3 Published on: 3.2.2024

Application example

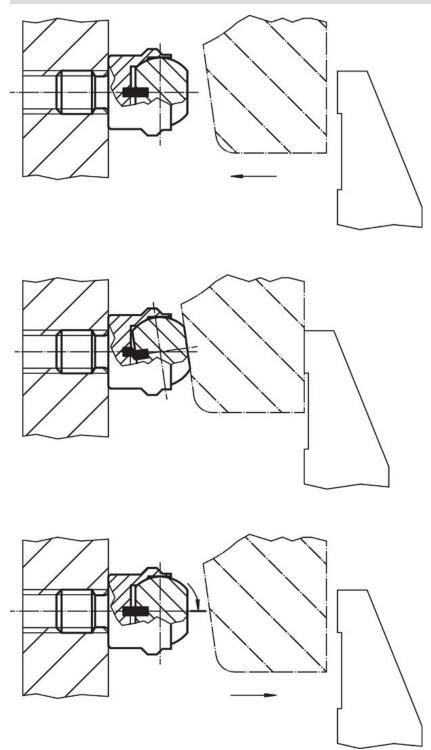

Erwin Halder KG



Page 2 of 3 Published on: 3.2.2024

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 3 of 3

Published on: 3.2.2024