# Positioning Sensors • pneumatical 22800.0400



## **Product Description**

Used in jigs and fixtures as positioning control for pre-machined workpieces. Sensitivity accuracy is 0.015-0.075 mm, depending on the workpiece surface. Contact control is achieved through compressed air backwash and is indicated on the monitoring unit.

## **Material**

## **Seating Pins**

· Tool steel, hardened, ground

#### Seal

PVC

## Supporting bar

Steel, blackened

## Plug-in nipple

Brass

#### More information


#### **Notes**

Further information on request.

## **Further products**

· Monitoring Units, for positioning sensors, pneumatic

## **Drawing**

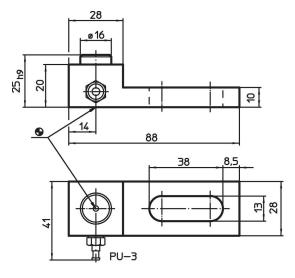

# **Order information**

	I	Art. No.
	 [g]	
	[9]	
with holding bar		
	237	22800.0400




Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 3.2.2024

# **Application example**

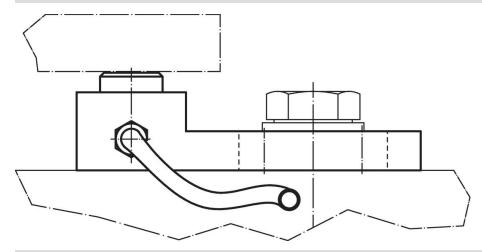

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Erwin Halder KG

## Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2

Published on: 3.2.2024