

Positioning Bushings • for index bolts and index plungers

EH 22110.




Product Description

Positioning bushings are suitable for index plungers and index bolts.
Low wear thanks to hardened running ball.

Material

- Steel, hardened, blackened
- Stainless steel, hardened


Drawing

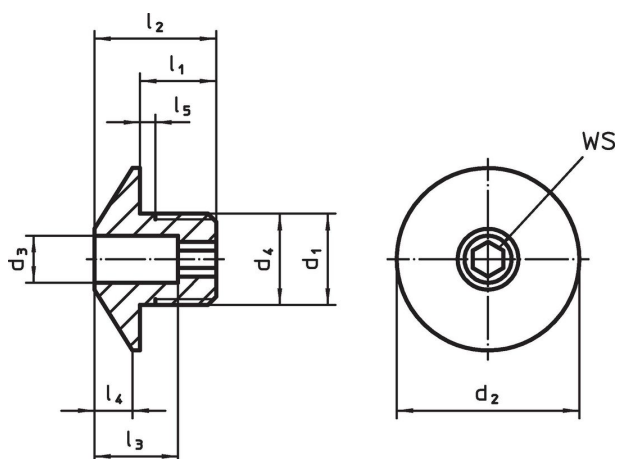

Order information

Dimensions									For pin	WS		Art. No.
d ₁	d ₃ +0.1	d ₂	d ₄ -0.05	l ₁	l ₂	l ₃	l ₄	l ₅ +0.5				
[mm]												
Steel												
M12 x 1,5	4.2	24	12	10	16	11	5	1.5	4	4	17	22110.0464
M12 x 1,5	5.2	24	12	10	16	11	5	1.5	5	4	17	22110.0465
M12 x 1,5	6.2	24	12	10	16	11	5	1.5	6	4	16	22110.0466
M16 x 1,5	8.2	32	16	12	20	13	7	1.5	8	6	36	22110.0468
M16 x 1,5	10.2	32	16	12	20	13	7	1.5	10	6	34	22110.0470
M16 x 1,5	12.2	32	16	12	20	13	7	1.5	12	6	33	22110.0472
Stainless steel												
M12 x 1,5	4.2	24	12	10	16	11	5	1.5	4	4	17	22110.0474
M12 x 1,5	5.2	24	12	10	16	11	5	1.5	5	4	17	22110.0475
M12 x 1,5	6.2	24	12	10	16	11	5	1.5	6	4	16	22110.0476
M16 x 1,5	8.2	32	16	12	20	13	7	1.5	8	6	36	22110.0478
M16 x 1,5	10.2	32	16	12	20	13	7	1.5	10	6	34	22110.0480
M16 x 1,5	12.2	32	16	12	20	13	7	1.5	12	6	33	22110.0482

Application example

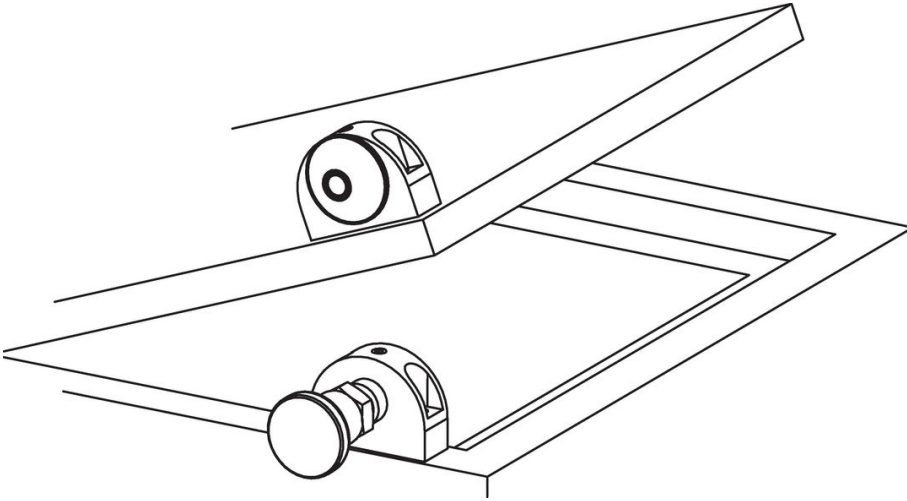

Compliance

For detailed compliance information please select the desired article number.