Locating Pins • DIN 6321

EH 22630.



Product Description

Cylindric locating pins (DIN 6321, form B) for locating workpieces in toleranced holes and also to be used as stops and feet.

Flattened locating pin (DIN 6321, form C) used to overcome differences in tolerances, between holes or to position an element in one direction only.

The bearing surface of the seating pin has no centre (picture 1). A centre is permitted for the seating pins (picture 2 and 3) according to DIN 6321.

Material


· Tool steel, hardened, ground


More information

Further products

- · Locating Pins, with bore hole similar to DIN 6321
- · Locating Pins, with ball end


Drawing





Erwin Halder KG






Order information

		Dimensio	ns	Location hole	-	Art. No.							
d ₁	I ₁	b	d ₂	l ₂	I ₄	D ₁	_						
g6			n6			H7							
		[mm]		[mm]	[9]								
locating pin, cylindric, DIN 6321, form B – picture 1													
6	7	_	4	6	4	4	1.7	22630.0020					
6	12	_	4	6	4	4	3.0	22630.0021					
8	10	_	6	9	6	6	4.9	22630.0022					
8	16	_	6	9	6	6	8.0	22630.0023					
10	10	_	6	9	6	6	6.9	22630.0024					
10	18	_	6	9	6	6	12.0	22630.0025					
12	10	_	6	9	6	6	10.0	22630.0026					
12	18	_	6	9	6	6	17.0	22630.0027					
16	13	_	8	12	8	8	22.0	22630.0028					
16	22	_	8	12	8	8	36.0	22630.0029					
20	15	_	12	18	9	12	58.0	22630.0030					
20	25	_	12	18	9	12	73.0	22630.0031					
25	15	_	12	18	9	12	66.0	22630.0032					
25	25	_	12	18	9	12	106.0	22630.0033					
locating pin, f	lattened, DIN 6	321, form C – pictu	re 2										
6	7	1.0	4	6	4	4	1.3	22630.0040					
6	12	1.0	4	6	4	4	2.2	22630.0041					
8	10	1.6	6	9	6	6	4.0	22630.0042					
8	16	1.6	6	9	6	6	5.5	22630.0043					
10	10	2.5	6	9	6	6	5.6	22630.0044					
10	18	2.5	6	9	6	6	8.9	22630.0045					
12	10	2.5	6	9	6	6	7.0	22630.0046					
12	18	2.5	6	9	6	6	11.0	22630.0047					
16	13	3.5	8	12	8	8	17.0	22630.0048					
16	22	3.5	8	12	8	8	26.0	22630.0049					

Page 1 of 2 Published on: 3.2.2024

		Dimensio	ns	Location hole	I	Art. No.		
d ₁	l ₁	b	d ₂	l ₂	I ₄	D ₁	_	
g6			n6			H7		
		[mm]		[mm]	[g]			
20	15	5.0	12	18	9	12	39.0	22630.0050
20	25	5.0	12	18	9	12	55.0	22630.0051
25	15	5.0	12	18	9	12	49.0	22630.0052
25	25	5.0	12	18	9	12	72.0	22630.0053

Application example

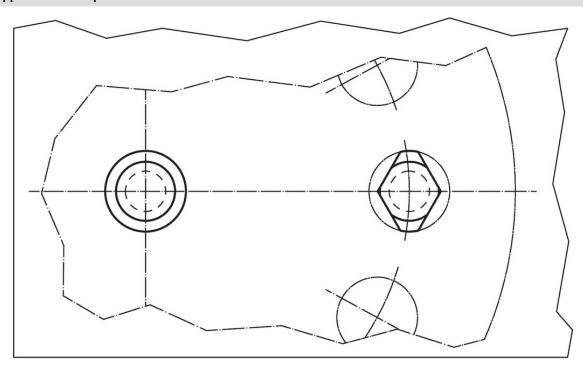

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 3.2.2024