

Lateral Plungers • smooth, without seal - INCH

EH 2B150.



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting.

Material

Body

- Aluminium Al

Spring

- Stainless steel
- Steel, blackened
- Steel, zinc-plated by galvanization

Pin

- Steel, case-hardened, zinc-plated by galvanization
- Thermoplastic POM, white

Assembly

Installation by pressing in.

Formula for calculating the center distance for the mounting hole:

$$l_0 = z/2 + w + x,$$

l_0 = center distance,

y = workpiece height,

w = workpiece length,

x = coordinate dimension,

s = stroke,

z = stop diameter

Calculation dimension x :

y greater than or equal to $l_2 - d_2/2$,

then $x = d_2/2 - s$

or

y smaller than $l_2 - d_2/2$,

then $x = d_2/2 - s - [(l_2 - d_2/2 - y) * 0,123]$

Characteristic

Version light spring load = spring from stainless steel

Version standard spring load = spring from steel, blackened


Version heavy spring load = spring from steel, zinc-plated by galvanization

More information

Further products

- Eccentric Mounting Bushings, for lateral plungers, smooth - INCH

Drawing

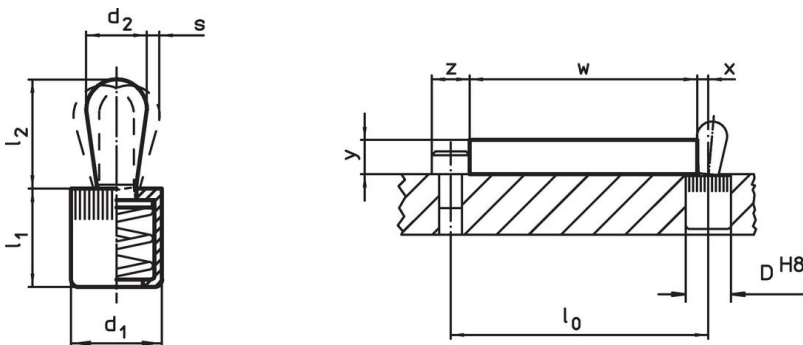

Order information

Dimensions		Spring load F max. ¹⁾ ~ [lb]	Dimensions		Stroke s [in]	Location hole D H8 [in]	 max. [°F]	 [oz]	Art. No.
d ₁	d ₂		l ₁	l ₂					
[in]			[in]						
Pin: Steel/Light spring load									
1/4	0.118	2.2	0.275	0.157	0.04	1/4	482	0.024	2B150.0010
7/16	0.197	4.5	0.433	0.263	0.06	7/16	482	0.107	2B150.0020
7/16	0.236	9.0	0.433	0.421	0.08	7/16	482	0.137	2B150.0025
1/2	0.315	11.2	0.525	0.535	0.09	1/2	482	0.261	2B150.0030
5/8	0.393	22.5	0.669	0.657	0.12	5/8	482	0.527	2B150.0040

¹⁾ statistical average value


Dimensions		Spring load F max. ¹⁾ ~ [lb]	Dimensions		Stroke s [in]	Location hole D H8 [in]	 max. [°F]	 [oz]	Art. No.
d ₁	d ₂		I ₁	I ₂					
[in]				[in]					
Pin: Steel/Standard spring load									
1/4	0.118	4.5	0.275	0.157	0.04	1/4	482	0.024	2B150.0011
7/16	0.197	11.2	0.433	0.263	0.06	7/16	482	0.115	2B150.0021
7/16	0.236	16.9	0.433	0.421	0.08	7/16	482	0.143	2B150.0026
1/2	0.315	22.5	0.525	0.535	0.09	1/2	482	0.277	2B150.0031
5/8	0.393	34.0	0.669	0.657	0.12	5/8	482	0.526	2B150.0041
Pin: Steel/Heavy spring load									
1/4	0.118	9.0	0.275	0.157	0.04	1/4	482	0.025	2B150.0012
7/16	0.197	21.5	0.433	0.263	0.06	7/16	482	0.123	2B150.0022
7/16	0.236	22.5	0.433	0.421	0.08	7/16	482	0.156	2B150.0027
1/2	0.315	34.0	0.525	0.535	0.09	1/2	482	0.292	2B150.0032
5/8	0.393	45.0	0.669	0.657	0.12	5/8	482	0.549	2B150.0042
Pin: Thermoplastic/Light spring load									
1/4	0.118	2.2	0.275	0.157	0.04	1/4	176	0.014	2B150.0050
7/16	0.197	4.5	0.433	0.263	0.06	7/16	176	0.062	2B150.0060
7/16	0.236	9.0	0.433	0.421	0.08	7/16	176	0.070	2B150.0065
1/2	0.315	11.2	0.525	0.547	0.09	1/2	176	0.118	2B150.0070
5/8	0.393	22.5	0.669	0.657	0.12	5/8	176	0.250	2B150.0080

¹⁾ statistical average value

Accessories

	Dimensions d ₁ [in]	 [oz]	Art. No.
assembly tool			
	1/4	0.678	22150.0830
	7/16	1.749	22150.0831
	1/2	2.321	22150.0832
	5/8	3.749	22150.0833

Application example

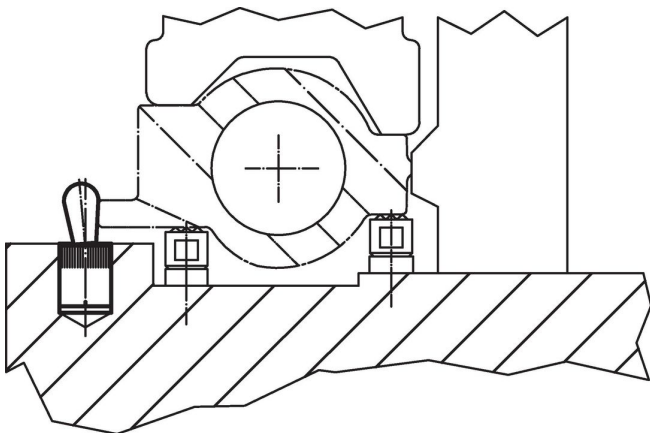

Compliance

For detailed compliance information please select the desired article number.