Spring Plungers ⋅ long 22070.0480



Product Description

To be used for ejecting, as a detent, for applying pressure or as a shock element.

Material

Pin

· Steel, case-hardened, black

Body

· Free cutting steel, blackened

Spring


Stainless steel

Assembly

Spring plungers can be mounted and removed by means of the slot or internal hexagon. Please use a special assembly tool for mounting with a slot (pin side).

Characteristic

Standard spring load: no marking



More information


Notes

Special types on request. Spring plungers are specially tested for spring range and forces.

References

Thread lock: polyamide all-arround coating (for details please refer to the technical appendix).

Drawing

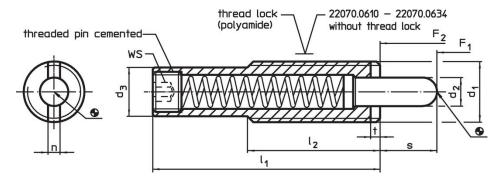

Erwin Halder KG

Order information

Dimensions						Stroke	ws	Spring load ¹⁾				I	Art. No.	
d ₁	d ₂	d ₃	l ₁	l ₂	n	t	s		F ₁	F ₂	min.	max.		
[mm]						[mm]	[mm]	[1		[°C	 	[g]		
body from free cutting steel, standard spring load, with thread lock														
M24	10	19.6	60	45	3.7	3	15	8	14	87	-30	90	132	22070.0480

¹⁾ statistical average value


www.halder.com Page 1 of 3

Published on: 3.2.2024

Accessories

		1	Art. No.							
	d ₁	b	d	l	_					
			[mm]		[9]					
Assembly Tool for mounting via slot (pin sided)										
	M24	100	19.9	100	258	22070.0838				

Application example

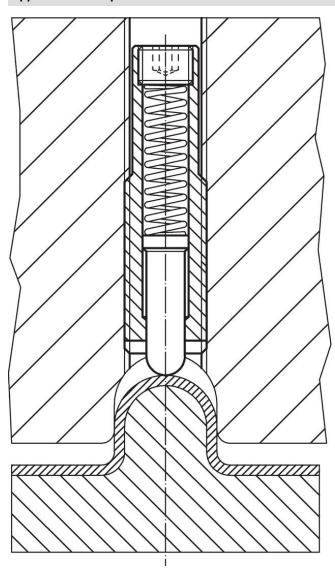



www.halder.com Page 2 of 3
Published on: 3.2.2024

Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 3 of 3

Published on: 3.2.2024