# **Spring Bodies** 22100.0224



# **Product Description**

Spring bodies can be used for locating.

#### **Material**

#### Body

· Steel, nickel-plated

# **Spring**


• Stainless steel 1.4310

#### More information

#### **Notes**

Special springs on request.

# **Drawing**

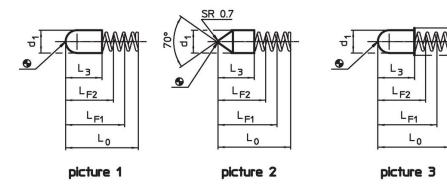


## **Order information**

		Dimer	nsions		Stroke	Spring load <sup>1)</sup>		Spring rate		I	Art. No.
d <sub>1</sub>	L <sub>0</sub>		L	L <sub>3</sub>	S	F <sub>1</sub>	F <sub>2</sub>		max.		
±0.05		for F <sub>1</sub>	for F <sub>2</sub>			~	~				
[mm]					[mm]	[N]		[N/mm]	[°C]	[g]	
body from steel, tipped – picture 2											
3	16	13	10.7	8.5	2.3	4.8	8.4	1.6	250	0.2	22100.0224

<sup>1)</sup> statistical average value

# **Application example**

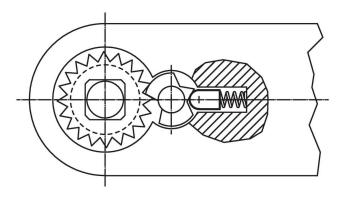

Erwin Halder KG

Page 1 of 2 www.halder.com Published on: 3.2.2024

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

## Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

#### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 2 of 2

Published on: 3.2.2024