Lateral Plungers • with thread, without seal, with female thread 22150.1356



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting.

Material

Body

Steel, zinc-plated

Threaded washer

· Steel, blackened

Spring

• Steel, zinc-plated by galvanization

Assembly

Formula for calculating the center distance for the mounting hole: $l_0 = z/2 + w + x$, l_0 = center distance, y = workpiece height, w = workpiece length, x = stroke, z = stop diameter Calculation dimension x for workpieces: x = d_2/2 - s

Lateral plungers are installed by screwing in by means of a mounting tool.

Characteristic


Version heavy spring load = spring from steel, zinc-plated by galvanization


More information

Notes

Individual set screws can be screwed in the plate with threaded hole.

Drawing

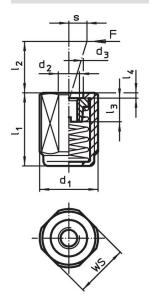



Order information


Dimensions		Spring load	Dimensions					Stroke	WS		Ĩ	Art. No.
d ₁	Ι ₁ -2	F max. ¹⁾ ~	d ₂	d ₃	l ₂	l ₃	I ₄	S		max.	-	
[mm]		[N]			[mm]			[mm]	[mm]	[°C]	[g]	
Heavy spring load												
M18 x 1,5	31.5	200	M6	10.1	11.5	7.5	1.5	3.2	16	250	24	22150.1356

1) statistical average value

Accessories

	Dimensions		Art. No.					
	d ₁	-						
	[mm]	[9]						
assembly tool								
1	M18 x 1,5	137	22150.0822					

Application example

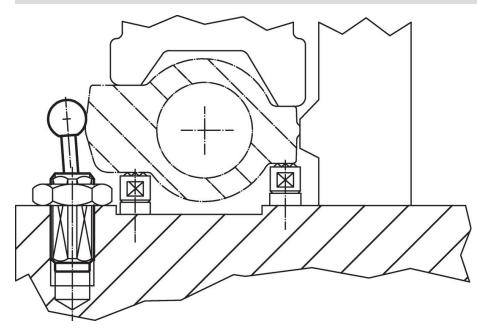

Compliance

RoHS compliant Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

