# Locating Pins • with bore hole similar to DIN 6321

22630.0230



# **Product Description**

Cylindric locating pins for locating workpieces in toleranced holes and also to be used as stops and feet.

Flattened locating pins used to overcome differences in tolerances, between holes or to position an element in one direction only.

Apart from size 6 additional safety by fastening possibilities from up and down (can be used also for dismounting). The outer dimensions are similar to DIN 6321.

#### Material


• Case-hardened steel, case-hardened, blackened and ground

#### More information

## **Further products**

- · Locating Pins, DIN 6321
- · Locating Pins, with ball end

# **Drawing**

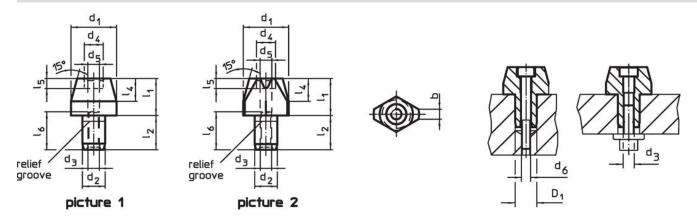

## **Order information**

Dimensions											Location hole	I	Art. No.	
d <sub>1</sub>	I <sub>1</sub>	<b>d₂</b> k6	l <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	I <sub>4</sub>	d <sub>5</sub>	l <sub>5</sub>	d <sub>6</sub>	I <sub>6</sub>	<b>D</b> ₁ H7	_		
g6   k6     [mm]											[mm]	[g]		
locating p	locating pin, cylindric, with bore hole – picture 1													
20	15	12	18	M6	10	9	5.2	5.1	M5	19	12	46	22630.0230	




Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 3.2.2024

# **Application example**

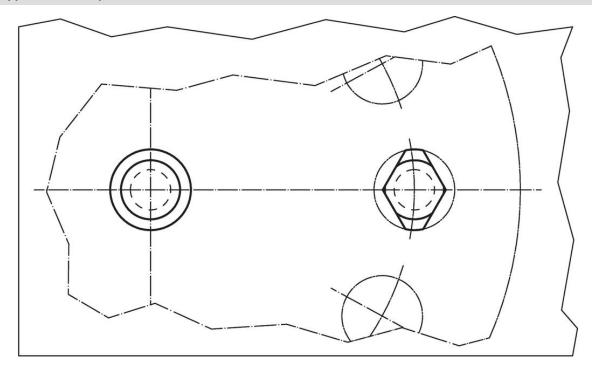

## Compliance

#### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

## **Does not contain SVHC substances**

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Erwin Halder KG

# Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Page 2 of 2 Published on: 3.2.2024

www.halder.com