# **Ball Casters** • screwable, plain bearing 22752.0061



# **Product Description**

For positioning and aligning of workpieces.

Because of the slide bearing, the ball can roll permanently, and the surface of the workpiece is

At temperatures > 20°C, the carrying figure decreases linearly. (Example: at 90°C the load bearing capacity is max. 60%)

#### Material

### **Bearing**

· plastic

#### Ball

· Ball-bearing steel, hardened

#### Screw


· Free cutting steel, blackened

## More information

#### **Notes**

Special types on request.


# **Drawing**



# **Order information**

d <sub>1</sub>	Dimensions d <sub>1</sub>   I <sub>1</sub>   Ball diameter		ws	Static carrying figure C <sub>0</sub>	Tightening torque max.	min.	max.	ı	Art. No.
[mm]		[mm]	[N]	[Nm]	[°C]		[g]		
Free cutting steel									
М6	8	2.5	1.5	172	0.11	-50	90	1	22752.0061

# **Application example**

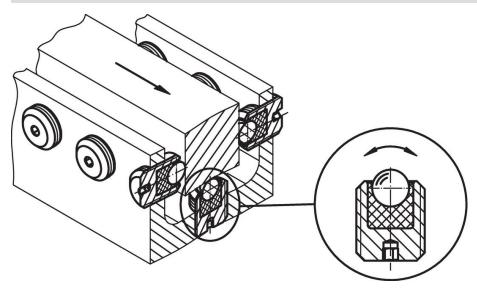

Erwin Halder KG



www.halder.com Page 1 of 2

Published on: 3.2.2024

# Compliance

# **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

## Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 2 of 2

Published on: 3.2.2024