# Lateral Plungers • smooth, with seal - INCH

## 2B150.0110



## **Product Description**

To be used for positioning and applying pressure, e.g. during painting and sandblasting. Sealed against chips and dirt.

#### **Material**

#### Seal

• CR

#### **Body**

Aluminium Al

#### **Spring**

· Stainless steel

#### Pin

Steel, case-hardened, zinc-plated by galvanization

### Assembly

Installation by pressing in.

Formula for calculating the center distance for the mounting hole:

 $I_0 = z/2 + w + x$ 

 $I_0$  = center distance,

y = workpiece height,

w = workpiece length,

x = coordinate dimension,

s = stroke,

z = stop diameter

Calculation dimension x:

y greater than or equal to  $l_2$  -  $d_2/2$ ,

then  $x = d_2/2 - s$ 

or

y smaller than  $l_2$  -  $d_2/2$ ,

then  $x = d_2/2 - s - [(l_2 - d_2/2 - y) * 0,123]$ 

### Characteristic


Version light spring load = spring from stainless steel


#### More information

#### **Further products**

• Eccentric Mounting Bushings, for lateral plungers, smooth - INCH

## **Drawing**





# Order information

Dimensions		Spring load	Dimensions		Stroke	Location	<b>x</b> <sup>2)</sup>		I	Art. No.	
d₁	d <sub>2</sub>	F max. <sup>1)</sup> ~	I <sub>1</sub> -0.08	l <sub>2</sub>	s	hole D H8		max.			
[in]		[lb]	[ii	n]	[in]	[in]	[in]	[°F]	[oz]		
Pin: Steel/Light spring load											
1/4	0.118	2.2	0.275	0.157	0.02	1/4	0.035	230	0.024	2B150.0110	

<sup>1)</sup> statistical average value

Erwin Halder KG



www.halder.com


Page 1 of 2 Published on: 2.5.2024

<sup>&</sup>lt;sup>2)</sup> If the workpiece height (y) is less than I2-d2/2, the coordinate dimension (x) must be calculated.

### **Accessories**

assembly tool	Dimensions d <sub>1</sub> [in]	[oz]	Art. No.
	1/4	0.678	22150.0830

## **Application example**

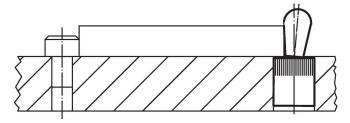

## Compliance

## **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

## Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 2.5.2024