# Handwheels • similar to DIN 950, stainless steel

# EH 24591.





# **Product Description**

Hub machined; rim turned and mirror-finished on all sides, non-machined surfaces cleanly blasted.

# Material

#### Handwheel

· Stainless steel A4

#### Machine handle

Stainless steel A4

#### **Assembly**


Shaft-end washers EH 22270. for axial fastening.

# More information

#### **Further products**

· Shaft-End Washers

# **Drawing**

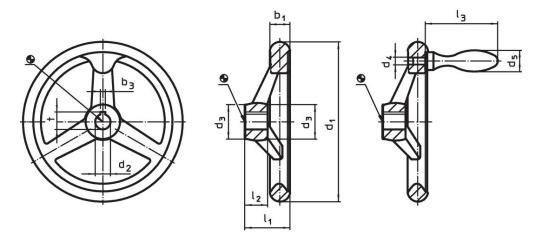

picture 1

picture 2

The orientation of the hub keyway may be different than shown in the drawing.

Erwin Halder KG

# **Order information**

Dimensions									b keyway, 885 sheet 1	Number of spokes	Corresponding machine handle	ı	Art. No.
d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	I <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	b <sub>3</sub>	t		DIN 39		
	H9		[mm	 1			~		[mm]		[mm]	[g]	
without hub keyway, without handle, form B-F/A (formerly: A 4) – picture 1													
100	10	25.5	_	_	33.0	17	_	-	_	3	_	431	24591.0005
125	12	27.0	_	_	35.5	18	-	-	-	3	_	633	24591.0010
140	14	29.0	_	_	38.5	19	-	-	_	3	_	851	24591.0015
160	14	31.0	-	-	39.5	20	-	-	-	3	-	1112	24591.0020
200	18	37.0	-	_	44.5	24	-	-	_	3	_	1877	24591.0030
with hub keyway, without handle, form N-F/A (formerly: A 3) – picture 1													
100	10	25.5	-	_	33.0	17	_	3	11.4	3	_	434	24591.0105
125	12	27.0	_	_	35.5	18	-	4	13.8	3	_	659	24591.0110
140	14	29.0	_	_	38.5	19	-	5	16.3	3	-	854	24591.0115
160	14	31.0	_	_	39.5	20	-	5	16.3	3	-	1115	24591.0120
200	18	37.0	_	_	44.5	24	-	6	20.8	3	_	1882	24591.0130
without hub keyway, with machine handle EH 24450., assembled, form B-F/G (formerly: F 4) – picture 2													
100	10	25.5	M 6	16	33.0	17	50	-	_	3	16	472	24591.0405
125	12	27.0	M 8	20	35.5	18	64	-	-	3	20	748	24591.0410
140	14	29.0	M 8	20	38.5	19	64	-	_	3	20	939	24591.0415
160	14	31.0	M10	25	39.5	20	80	-	-	3	25	1273	24591.0420
200	18	37.0	M10	25	44.5	24	80	-	_	3	25	2000	24591.0430

www.halder.com Page 1 of 2

Published on: 3.2.2024

Dimensions									b keyway, 8885 sheet 1	Number of spokes	Corresponding machine handle	Ĭ	Art. No.
d <sub>1</sub>	<b>d</b> <sub>2</sub> H9	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	I <sub>1</sub>	l <sub>2</sub>	I <sub>3</sub> ~	b <sub>3</sub>	t		DIN 39		
	[mm]										[mm]	[g]	
with hub keyway, with machine handle EH 24450. assembled, form N-F/G (formerly: F 3) – picture 2													
100	10	25.5	M 6	16	33.0	17	50	3	11.4	3	16	473	24591.0505
125	12	27.0	M 8	20	35.5	18	64	4	13.8	3	20	753	24591.0510
140	14	29.0	M 8	20	38.5	19	64	5	16.3	3	20	939	24591.0515
160	14	31.0	M10	25	39.5	20	80	5	16.3	3	25	1282	24591.0520
200	18	37.0	M10	25	44.5	24	80	6	20.8	3	25	2000	24591.0530

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

#### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 3.2.2024