# Mounting Pads 22590.0638



## **Product Description**

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

## Material

## Ball element with bolt

• Stainless steel 1.4305

#### Lock nut

• Stainless Steel A2, DIN 934

## Pad

• Stainless steel 1.4305

## More information


## Notes


For the versions  $d_1$  = M10 and M12 the lock nut conforms to DIN 934.



Erwin Halder KG Page 1 of 3 www.halder.com

# Drawing






# **Order information**

d <sub>1</sub>	Dimensions						Load capacity for static load max.	max.	Ĭ	Art. No.
[mm]						[mm]	[kN]	[°C]	[g]	
pad and ball element with bolt from steel – picture 2, Stainless steel										
M10	100	32	95.5	22	5	17	16	250	134	22590.0638

# **Application example**

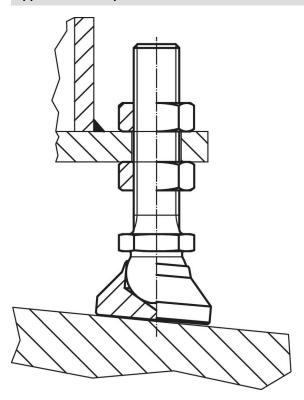

Erwin Halder KG

## Compliance

## **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

## Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

## Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 3 of 3

Published on: 6.4.2024